



GABLER

# REFRIGERATION OR DEEP-FREEZING – ONE TEMPERATURE RANGE

## THE TECHNICAL ADVANTAGES OF STANDARD GABLER CONTAINERS

- Refrigeration system installed in the container (low-noise technology)
- Use of semi-hermetic, performance-controlled refrigeration compressor
- Installed cooling capacity guarantees the desired room temperature, even when outside temperatures are extremely high
- Air-cooled condenser, designed for an ambient temperature of +37°C
- Electric control cabinet is easily accessible
- Temperature can be set and changed very easily
- Containers can be placed on the floor or on a loading ramp by means of an exchange platform
- Floor is easy to clean
- Floor load capacity 1000 Kp/m<sup>2</sup>
- Containers come with SMS error message feature
- Containers are built according to the HACCP standard
- SUVA-compliant personal protection device
- When empty, the containers can be moved at any time using a forklift truck
- Particularly flexible with regard to our customers individual wishes and requirements
- Insulation 100 or 140 mm
- Base in stainless steel with TRI sheet metal
- On-site power connection

## POSSIBLE APPLICATIONS

Food | Pharma | Chemistry | Gastro | Catering | Events/Open-air

## STANDARD CONTAINER 3 METER



### REFRIGERATED/DEEP-FREEZE CONTAINER 10 FT

Number of pallets (euro)	3
Number of pallets (euronorm)	6
Number of pallets (gastronorm)	12
Outer dimensions	3000 x 2438 x 2564
Inner dimensions	1795 x 2138 x 2280
Door dimensions	900 x 1900
Room temperature	0 / +8°C bzw. -22°C
Voltage V/Hz/Ph	400 / 50 / 3
Pre-fuse	20 A
Plug connection	32 A 5P
Container empty	1700 kg



GABLER

## STANDARD CONTAINER 4.5 METER



### REFRIGERATED/DEEP-FREEZE CONTAINER 15 FT

Number of pallets (euro)	6
Number of pallets (euronorm)	13
Number of pallets (gastronorm)	21
Outer dimensions	4543 x 2438 x 2564
Inner dimensions	3338 x 2138 x 2280
Door dimensions	1000 x 1900/2000
Room temperature	0 / +8°C bzw. -22°C
Voltage V/Hz/Ph	400 / 50 / 3
Pre-fuse	20 A
Plug connection	32 A 5P
Container empty	2500 kg

## STANDARD CONTAINER 4.5 METER PLUS



### REFRIGERATED/DEEP-FREEZE CONTAINER 15 FT PLUS

Number of pallets (euro)	7
Number of pallets (euronorm)	16
Number of pallets (gastronorm)	25
Outer dimensions	4550 x 2980 x 2600
Inner dimensions	3319 x 2604 x 2180
Door dimensions	2000 x 2000, double-leaved
Room temperature	0 / +8°C bzw. -22°C
Voltage V/Hz/Ph	400 / 50 / 3
Pre-fuse	25 AT
Plug connection	32 A 5P
Container empty	2800 kg

## STANDARD CONTAINER 6 METER



### REFRIGERATED/DEEP-FREEZE CONTAINER 20 FT

Number of pallets (euro)	8
Number of pallets (euronorm)	15-18
Number of pallets (gastronorm)	30-33
Outer dimensions	6058 x 2438 x 2564
Inner dimensions	4705 x 2060 x 2240
Door dimensions	1400/1800 x 2000
Room temperature	0 / +8°C bzw. -22°C
Voltage V/Hz/Ph	400 / 50 / 3
Pre-fuse	25 AT
Plug connection	32 A 5P
Container empty	3200 kg



GABLER

## STANDARD CONTAINER 6 METER PLUS



### REFRIGERATED/DEEP-FREEZE CONTAINER 20 FT PLUS

Number of pallets (euro)	11
Number of pallets (euronorm)	21
Number of pallets (gastronorm)	42
Outer dimensions	6058 x 2980 x 2700
Inner dimensions	4733 x 2580 x 2408
Door dimensions	2000 x 2000
Room temperature	0 / +8°C bzw. -22°C
Voltage V/Hz/Ph	400 / 50 / 3
Pre-fuse	25 AT
Plug connection	32 A 5P
Container empty	3900 kg


## STANDARD CONTAINER 7.5 METER



### REFRIGERATED/DEEP-FREEZE CONTAINER 25 FT

Number of pallets (euro)	12
Number of pallets (euronorm)	21
Number of pallets (gastronorm)	45
Outer dimensions	7618 x 2438 x 2564
Inner dimensions	6465 x 2130 x 2215
Door dimensions	1800 x 2000, double-leaved
Room temperature	0 / +8°C bzw. -22°C
Voltage V/Hz/Ph	400 / 50 / 3
Pre-fuse	25 AT
Plug connection	32 A 5P
Container empty	3800 kg

## STANDARD CONTAINER 7.5 METER PLUS

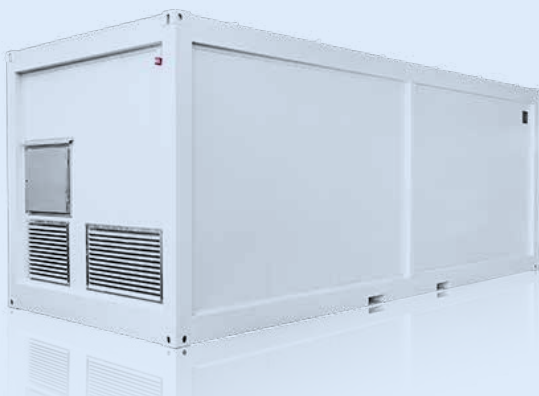

### REFRIGERATED/DEEP-FREEZE CONTAINER 25 FT PLUS

Number of pallets (euro)	15
Number of pallets (euronorm)	28
Number of pallets (gastronorm)	56
Outer dimensions	7480 x 2980 x 2900
Inner dimensions	6170 x 2580 x 2435
Door dimensions	2000 x 2000, double-leaved
Room temperature	0 / +8°C bzw. -22°C
Voltage V/Hz/Ph	400 / 50 / 3
Pre-fuse	16 AT
Plug connection	32 A 5P
Container empty	4200 kg